



## CABLE DREi Test me. Feel me.

This fast guide will help you to install your *CABLE DREi*.  
More information can be found at  
[www.neutralaudio.com](http://www.neutralaudio.com)

### 1º) CONNECTION

**!** *The electrical mains voltage must be at 230VAC 110VAC.  
Turn off the amplifiers before connecting anything.  
We recommend that the amplifier must always be the last device  
to be turned on and the first to be turned off, to avoid unwanted  
noises and possible speaker damage.*

Observe the figure for connection. Connect the 12VDC power adapter, supplied, to one of the cable boxes. If you have more cable boxes use the supplied jump cable to connect them together. You can use either of the 2 connections on each box.

One power adapter can supply power to up to 10 boxes.

The direction of the audio signal should follow the arrow printed on the box. It will not work otherwise

This guide is valid for all models DUO, XLR, RCA and BOX.

It is normal the boxes heat up slightly with the functioning.

### 2º) START

Once connected, plug all the other elements in.


The first time you use *CABLE DREi* let it work with music for at least 1 hour before you start to evaluate it. You will notice the *DREi* behavior changing in this short time reaching a good initial synergy.

Its ideal performance stage is reached after a minimum of 250 hours of use with music. If you want to keep the *CABLE DREi* on, you can, as it has been designed for this

### ENHANCE THE AUDIO SYSTEMS

*CABLE DREi* is an active cable with an advanced *DREi* module that will increase the performance of your audio system, optimizing the connections between the elements and offer an extraordinary musicality, with crystal clear sound with excellent opening and three-dimensionality. A exquisite level of detail and silence.

The total system synergy will be much more equilibrated, *CABLE DREi*'s control in this aspect is outstanding.

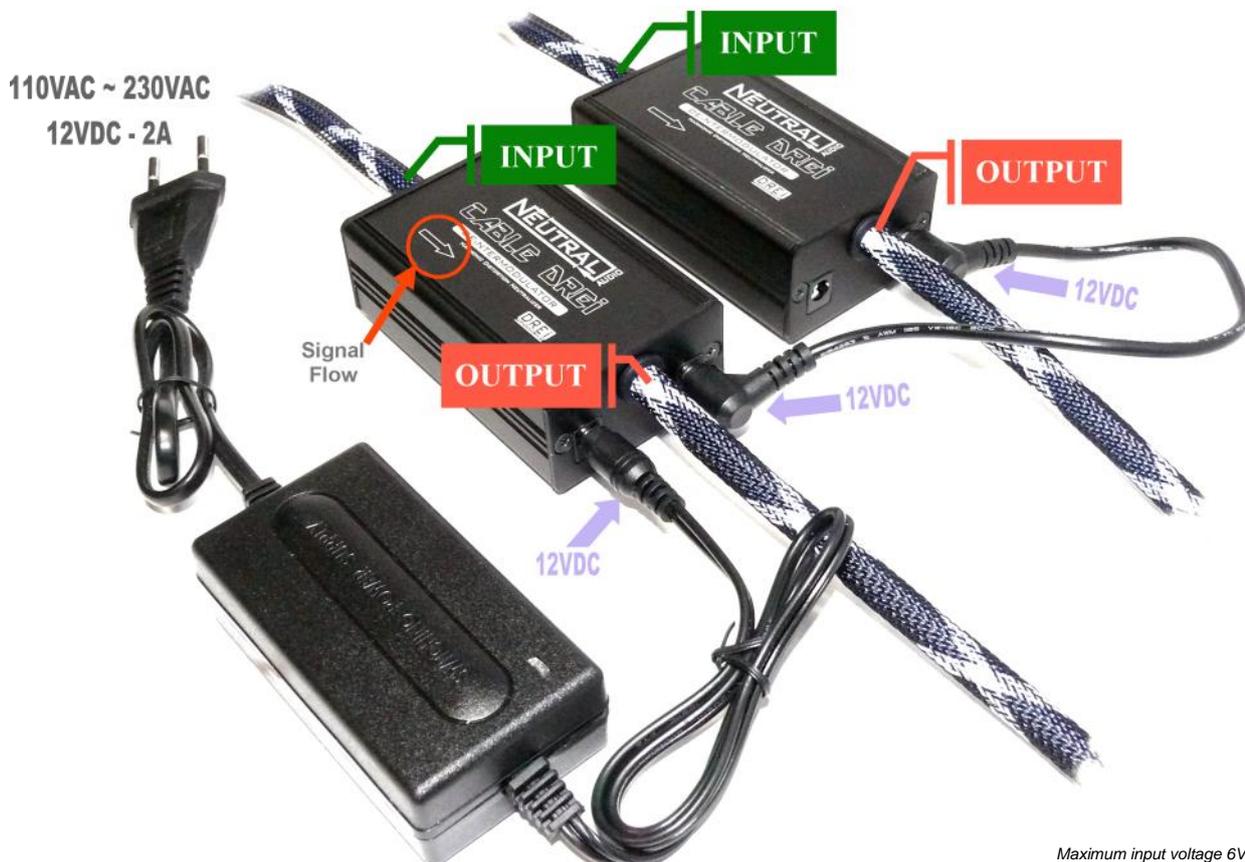

Maximum input voltage 6Vpp RCA / 12Vpp XLR